


## Features

- **High Efficiency Permanently Lubricated Variable Speed (PSC) Motors.**
- **Tilted core design for maximum efficiency**
- **Constructed using UL certified sound insulation. The Quietest in its class**
- **Military Grade Specification: constructed using heavy gauge steel, welded joints, individually powder coated**
- Over all size **36"(W)x36"(D)x16.125"(H)**
- Power ratings: 115V / 1 / 60 Hz, 5.6 Amp., Standby current is 10W only
- Washable Enthalpy core and Filters (MERV-4)
- Drainless Design
- Suitable for horizontal & vertical installation
- Exhaust up to four washrooms
- Suitable for Corridor, gym, common areas, classrooms
- Two Speed exhaust (High / Low) - up to 700 CFM maximum
- Continuous fresh air supply at Normal speed up to 700 CFM
- Furnace / Fan-coil / Heat Pump Interlock
- Dual Power Failure / Freeze Protection
- Weight approximately 150-175 lbs.
- **Meets All LEED Standards and Building Code Requirements**
- **SMART IAQ™ Enabled**
- **5 Year Limited Warranty**

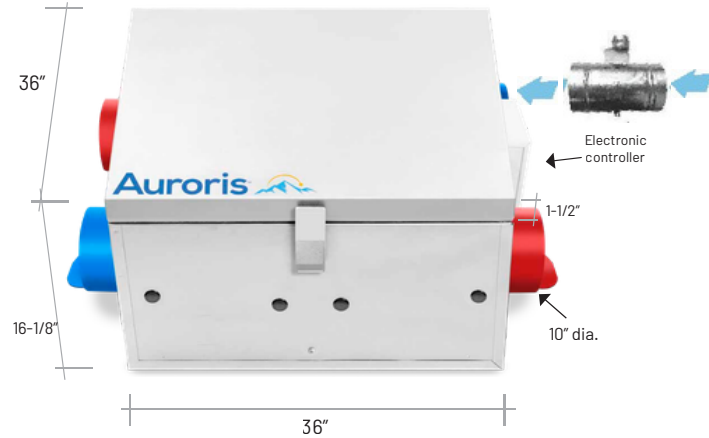

### Accessories (Included):


- Webbing Installation Kit or 4 PS Mounting brackets

### Optional:


- Intermittent Switch, 5VDC
- Smart IAQ™ Controller
- Push button timer switch (20/40/60 Min., 5VDC)
- Motorized Spring Return Backdraft Damper (option-2)

## Residential Installation Options:

Furnace Return Air-duct Connection

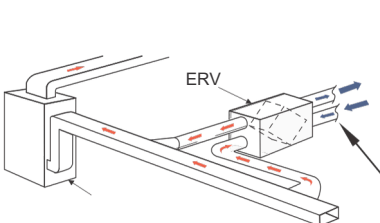


Semi Ducted System

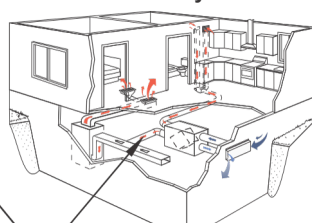

Motorized spring return damper  
(Highly Recommended)

Fully Ducted System



Fully Ducted System



ERV with Fan Coil System



Installation options for Indoor Air Quality/Safety




- FRESH AIR
- EXHAUSTED AIR



## VENTILATION PERFORMANCE

External Static pressure		Net Supply Air Flow		Gross Air Flow			
				Supply		Exhaust	
Pa	in. W.C.	L/s	CFM	L/s	CFM	L/s	CFM
0	0.00	303	642	306	648	331	700
25	0.10	288	611	291	617	311	659
50	0.20	279	590	281	596	296	628
75	0.30	273	578	276	584	286	607
100	0.40	261	554	264	560	284	601
124	0.50	249	529	252	534	272	576
149	0.60	237	502	239	507	256	542
174	0.70	222	471	225	476	240	509
199	0.80	211	447	213	452	225	476
224	0.90	195	413	197	417	209	443
249	1.00	179	380	181	384	193	410

## FAN DATA

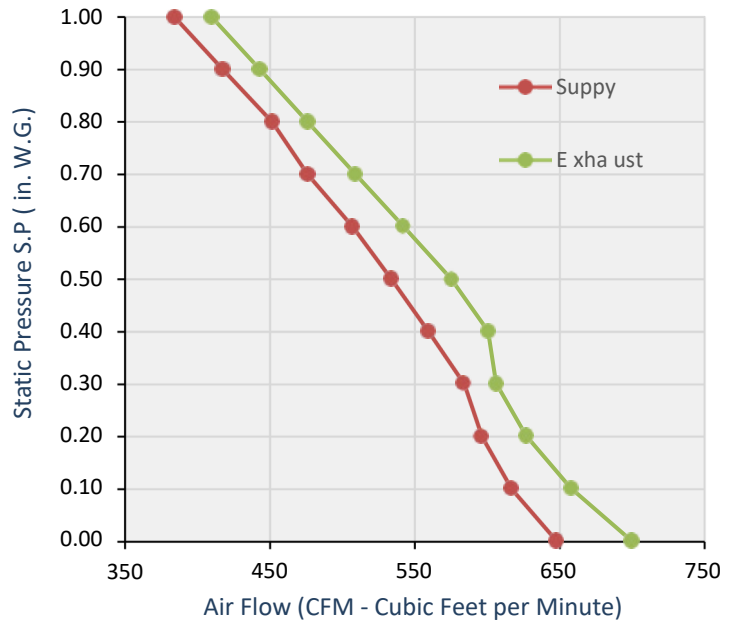

MODEL	Normal Speed Supply/Exhaust (Constant Ventilation)	High Speed Exhaust (Activated by switch)	Maximum Power Rating	Sound at full speed
			120V / 1 / 60Hz	
ESHO-700	200 ~ 500 CFM	200 ~ 700 CFM	5.6 Amp.	61 dBA @ 50Pa
	variable	variable		

\*Normal and high speed can be adjusted by either installer or factory using speed controllers mounted on the main controller of the unit.

## ENERGY PERFORMANCE

ESHO-700		Supply Temperature		Net Airflow		Sensible Effectiveness	Latent Effectiveness
		°C	°F	L/s	CFM		
Heating	I	0	32	118	250	82.7%	71.3%
	II	0	32	189	400	81.3%	70.0%
	III	0	32	236	500	79.1%	68.1%
Cooling	I	35	95	118	250	80.9%	70.3%
	II	35	95	189	400	79.8%	68.5%
	III	35	95	236	500	78.1%	67.3%

